


Resistivity and Vibration GV Tags


In order to support Q-Bus GV (Generic Variables) tags they must first be assigned a WITS ID.

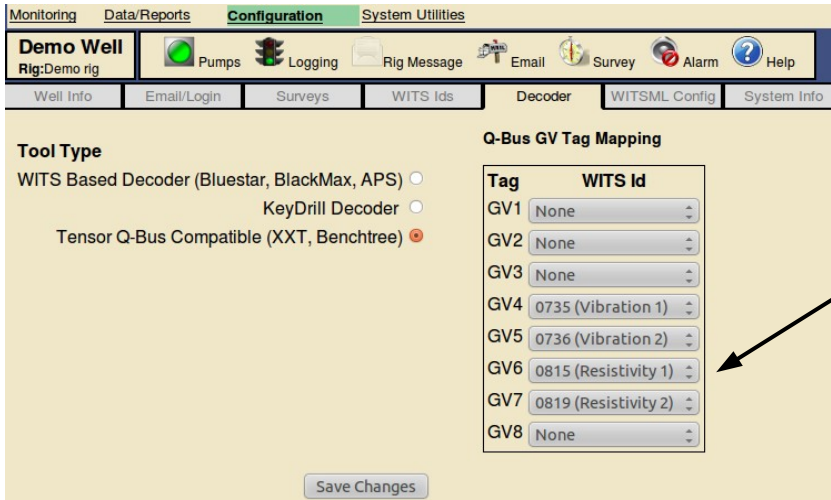


In the decoder configuration select the WITS ID to assign each GV tag to.

Note that some WITS IDs have specific data assigned to them.

Afterwards, go to the WITS Ids tab and ensure that the IDs exists for the GV tags.

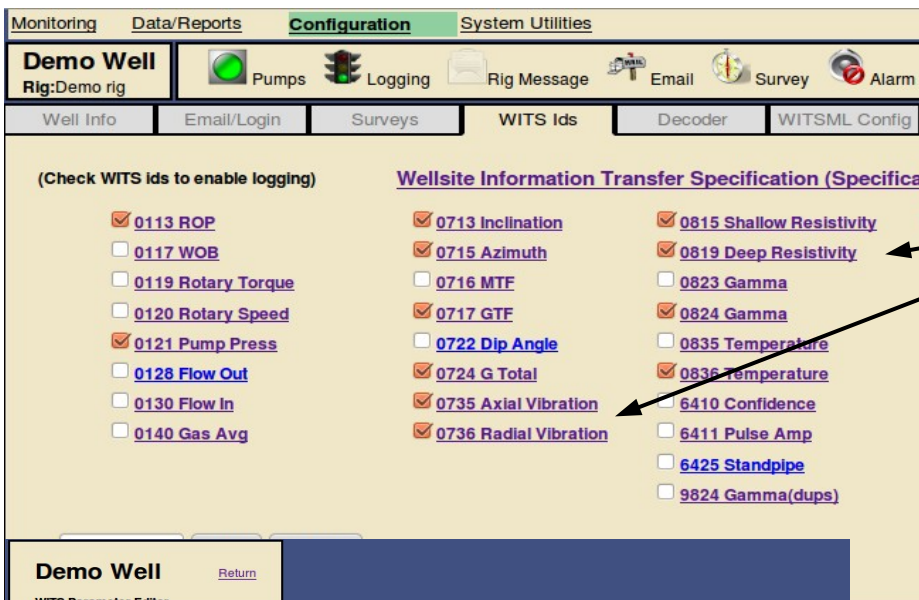

New WITS IDs added

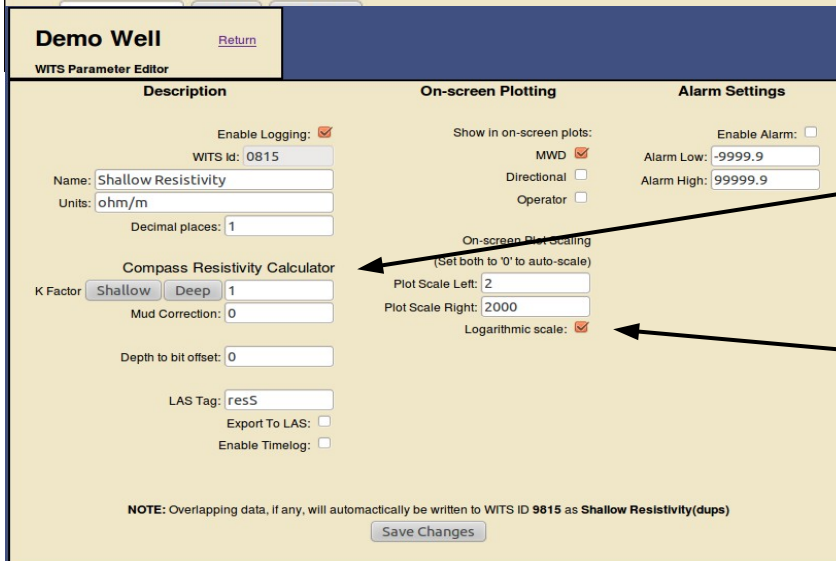

For resistivity tools, the WITS ID configuration editor includes a calculator for the Compass Resistivity tool.

Also note that there is a checkbox for generating logarithmic scales on the screen display.